





Lift Type Non Return Valve



Features	
DESIGN STD	AS PER BS 1873 / 1868
FACE TO FACE	AS PER ASME B 16.10
FLANGE END	AS PER ASME B 16.5
TESTING STD	AS PER BS 5146, ISO 5208

Material Specifications		
1	BODY	CF8M, CF8, CF3M, CF3, WCB ETC.
2	DISC	CF8M, CF8, CF3M, CF3, WCB ETC.
3	COVER	CF8M, CF8, CF3M, CF3 ETC.
4	GASKET	PTFE, GLASS OR CARBON PTFE ETC.

Details of Dimension					
Size	F/F	PCD	OD	RF	Dia M
15	108	60.5	89	35	16
20	117	70	98.5	43	16
25	127	79.5	108	51	16
40	165	98.5	127	73	16
50	203	120.5	152.5	92	19
65	216	140	178	105	19
80	241	152.5	191	127	19
100	292	190.5	229	157	19

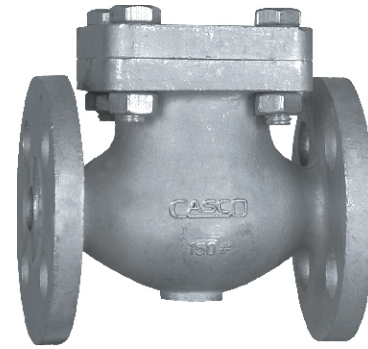


Swing Check Valve

Features	
DESIGN STD	AS PER BS 1868
FACE TO FACE	AS PER ASME B 16.10
TESTING STD	AS PER BS 5146, ISO 5208

Material Specifications		
1	BODY	CF8M, CF8, CF3M, CF3, WCB ETC.
2	SIDE PIECE	CF8M, CF8, CF3M, CF3, CA-15 ETC.
3	TRIM	SS 316., SS 304, SS 316L, 304L ETC.


Details of Dimension						
Class	150 #			300 #		
Size	F/F	PCD	OD	F/F	PCD	OD
25	127	79.5	108	216	89	124
40	165	98.5	127	241	114	156
50	203	120.5	152.5	267	127	165
65	216	140	178	292	149	190
80	241	152.5	191	318	168	210
100	292	190.5	229	365	200	254



Butterfly Valve

Features	
DESIGN STD	AS PER BS 5155
FACE TO FACE	AS PER BS 5155
TESTING STD	AS PER BS 5146, ISO 5208

Material Specifications		
1	BODY	C.I., WCB, CF8, CF8M
2	DISC	CF8M, CF8, WCB, C.I.
3	BODY LINER	EPDM, NITRILE, PTFE, VITON

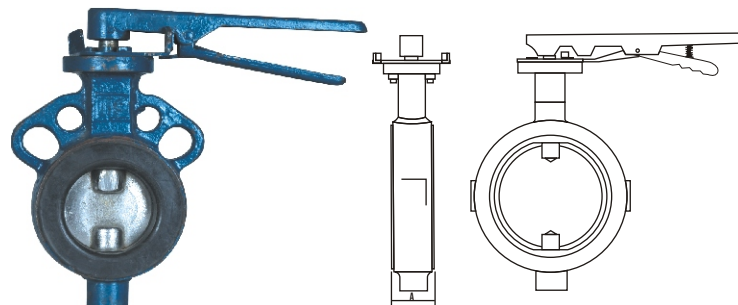

Details of Dimension							
Class	150 #						
SIZE	40MM	50MM	80MM	100MM	150MM	200MM	300MM
A	37	43	46	52	56	60	78