




3 Piece Design Triclover End Ball Valve

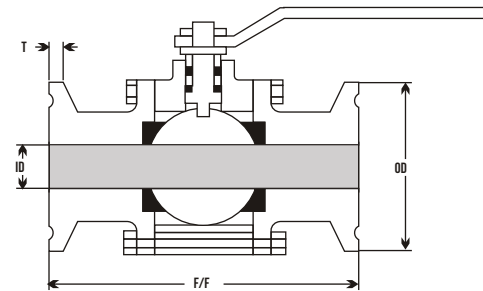

Features		Material Specifications		
DESIGN STD	AS PER BS 535 1	1	BODY	CF8M, CF8, CF3M, CF3, WCB ETC.
FACE TO FACE	MFG. STANDARD	2	SIDE PIECE	CF8M, CF8, CF3M, CF3, WCB ETC.
END CONNECTOR	TRICLOVER END	3	BALL	SS 316., SS 304, SS 316L, 304L ETC.
TESTING STD	AS PER BS 5 146, ISO 5208	4	SEAT	PTFE, GLASS OR CARBON PTFE ETC.

Detail of Dimension

Size	F/F	Bore ID	OD Clamp Dia D	Thickness T
15	80	12.5	34	2.8
20	85	18	34	2.8
25	90	24	50.5	2.8
40	100	38 TO 32 (TAPPER)	50.5	2.8
50	125	50 TO 42.5 (TAPPER)	64	2.8


Extended Steam Ball Valve

Salient Features

- (1) SINGLE PIECE DESIGN BODY AVAILABLE ON BULK REQUIREMENT
- (1) INVESTMENT CASTINGS BODY, SIDE PIECE

Hydro Test Pressure

	SHELL	SEAT
150 #, "E", "F"	32 KG/CM ²	23 KG/CM ²
300 #	79 KG/CM ²	58 KG/CM ²

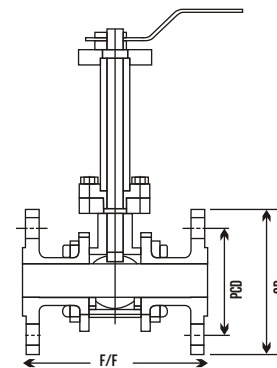

Details of Dimension

Class	150 #			300 #		
	Size	F/F	PCD	OD	F/F	PCD
15	108	60.5	89	140	67	95
20	117	70	98.5	152	83	117
25	127	79.5	108	165	89	124
40	165	98.5	127	191	114	156
50	178	120.5	152.5	216	127	165