


1 Piece Screwed End Full Bore Ball Valve





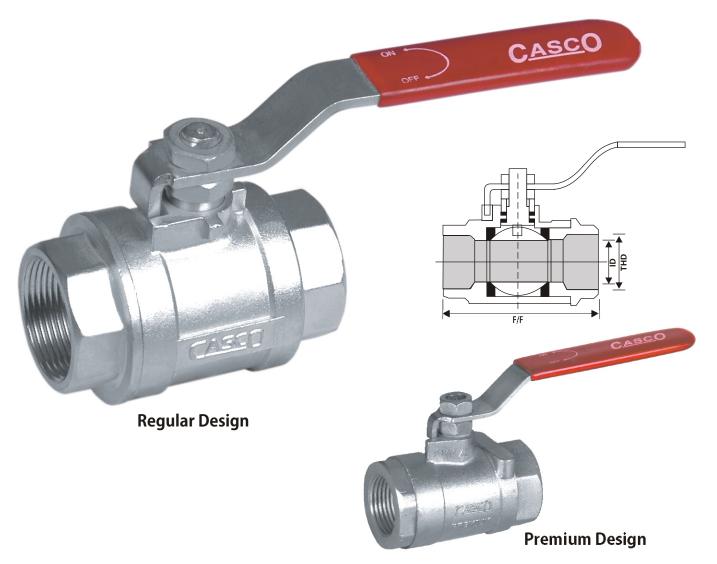

Features			Material Specifications		
DESIGN STD	AS PER BS 5351	1	BODY	CF8M, CF8, CF3M, CF3, WCB ETC.	
END CONNECTOR	SOCKET END, SCREWED END BSP/NPT	2	SIDE PIECE	CF8M, CF8, CF3M, CF3, WCB ETC.	
TESTING STD	AS PER BS 5146, ISO 5208	3	BALL	SS 316., SS 304, SS 316L, 304L ETC.	
SIZE	15MM TO 80MM	4	SEAT	PTFE, GLASS OR CARBON PTFE ETC.	

Type	e "Casco" Regular			"Casco Premium"			
SIZE	F/F	BORE ID	THREAD BSP/NPT	F/F	BORE ID	THREAD BSP/NPT	
6	62	6	1/4"	62	6	1/4"	
10	62	9	3/8"	62	9	3/8"	
15	65	12.5	1/2"	62	12.5	1/2"	
20	75	19	3/4"	75	19	3/4"	
25	85	25	1"	85	25	1"	
32	92	32	11/4"	92	32	1¼"	
40	110	38	1½"	110	38	1½"	
50	124	50	2"	124	50	2"	
65	135	64	2 ½"				
80	153	75	3"	UNDER DEVELOPMENT			